

# Texsteam Pumps

Precise chemical injection pumping

---



Today, over-injecting and incurring wasted chemical costs are the norm. They shouldn't be.

Cheap and imprecise chemical injection pumps, operating in ever-changing conditions, leads to unpredictable injection rates. Now, chemicals represent one of the highest operating expenses in a well site. As a result, the average 20% rate of over-injection is costing operators thousands of dollars a year, for each injection point!

**STOP over-injecting.**

**STOP wasting costly chemicals.**

**START delivering controlled intelligence, today.**



With a wide range of capacities and operating pressures, Texsteam's versatile pumps can handle challenging chemical pumping requirements in oil and gas production, gas pipeline, industrial, water treatment and chemical processing applications.

By far, the largest number of Texsteam pump projects involves chemical injection into wells and pipelines, with wells comprising the bulk of those applications. Texsteam pumps can inject more than a dozen different chemicals to improve well production, maintain well or pipeline flow, and render harmless the corrosive or toxic substances contained in natural gas. The Texsteam line of pumps features a large selection of positive displacement chemical injection pumps to serve the distinctive needs of the oil and gas industry.


## Applications

- Injection of methanol, H<sub>2</sub>S scavenger, de-emulsifiers, solvents, corrosion inhibitors, lubricants and other chemicals
- Transfer of liquid from one container to another

# Series 1200 Beam Driven Injection Pump

Designed specifically for operation on a beam pumped oil well, the Series 1200 pump is powered by direct connection to the movement of a walking beam, rod line or rocker arm.

- Single or dual-headed units available
- Simple design, easy maintenance

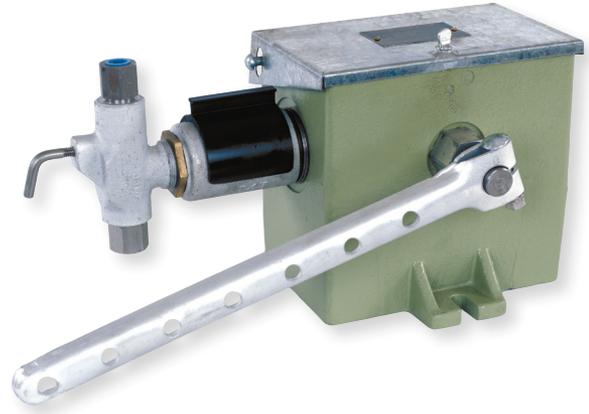

Plunger Size	Maximum Discharge Pressure		Maximum Volume Output Pints (Liters) per Day	
	psi	(bar)	Simple Unit	Duplex Unit
3/16"	3000	(206)	4.5 (2)	9 (4)
1/4"	1,500	(103)	7 (3.3)	14.5 (6.8)
3/8"	1,000	(68.9-69)	18 (8.5)	36 (17)
1/2"	500	(34)	32 (15)	64 (30)

## Series 2200 Electric Driven Injection Pump



Model Number	Plunger Size	Strokes per Minute	Maximum Output 1000 psi (70 kg/cm <sup>2</sup> ) per Head
			Gallons (Liters) per Day
2204	3/16"	15	2.19 (8.3)
		30	4.37 (16.5)
		60	8.74 (33.0)
2201	1/4"	15	3.84 (14.5)
		30	7.68 (29.0)
		60	15.36 (58.1)
2203	3/8"	15	8.64 (32.7)
		30	17.28 (65.4)
		60	34.56 (130.8)
2205	1/2"	15	15.36 (58.1)
		30	30.72 (116.2)
		60	61.44 (232.5)

The Series 2200 electric driven injection pump offers moderate flow and pressure rates.

- 1/4 horsepower motor available in TENV or EXP, single or 3 phase
- 316 stainless steel fluid end
- Simplex or duplex available
- Maximum discharge pressure 1,000 psi (69 bar)
- Maximum volume 120 gallons per day (duplex model)
- Built-in gear reducer available in 15, 30, or 60 strokes/minute
- Crosshead bearing supported on both ends
- Flow adjustable while running

## Series 2400 Electric Driven Injection Pump



Plunger Size	Strokes per Minute	Maximum Discharge Pressure		Volume Gallons (Liters) per Day per Head			
		psi	(bar)	Maximum		Minimum	
1/2"	30	4000	(276)	70	(265)	7	(26.5)
	60	4000	(276)	138	(522)	14	(53)
3/4"	30	3200	(220)	160	(605)	16.5	(62)
	60	3200	(220)	330	(1249)	33	(125)
1"	30	1000	(69)	260	(984)	25	(94)
	60	1000	(69)	510	(1930)	56	(212)
1-1/4"	30	500	(34)	440	(1665)	44	(166)
	60	500	(34)	880	(3331)	88	(333)

The Series 2400 electric driven injection pump utilizes C-faced motors and common gear reducer available in two speeds of 30 or 60 strokes per minute.

- Maximum discharge pressure: 4,000 psi (276 bar) with 1/2" plunger
- Maximum volume: 1760 GPD (6,662 Liters) with 1-1/4" plunger
- Simplex, duplex or quad configuration
- 1 or 3 phase - TEFC or explosion proof motors available
- Plunger sizes: 1/2", 3/4", 1", 1-1/4"
- Flow adjustable while running with adjustable crosshead

# Series 2500 Electric Driven Injection Pump



Plunger Size	Strokes per Minute	Maximum Discharge Pressure		Volume Gallons (Liters) per Day per Head			
		psi	(bar)	Maximum		Minimum	
3/16"	15	6000	(414)	2.4	(9)	.2	(.7)
	30	6000	(414)	4.9	(18.5)	0.5	(1.8)
	60	6000	(414)	9.8	(37)	1	(3.7)
	120	4000	(276)	18.7	(70.7)	1.9	(7.1)
1/4"	15	3200	(221)	4.3	(16.2)	0.4	(1.5)
	30	4000	(276)	8.6	(32.5)	0.9	(3.4)
	60	4000	(276)	17.3	(65.5)	1.7	(6.4)
	120	2100	(145)	34.6	(131)	3.5	(13.2)
3/8"	15	1450	(100)	9.8	(37)	1	(3.7)
	30	1800	(124)	19.6	(74.1)	2	(7.5)
	60	1700	(117)	39.2	(148.4)	3.9	(14.7)
	120	950	(65)	78.5	(297.1)	7.8	(29.5)
1/2"	15	820	(56)	17.4	(65.8)	1.7	(6.4)
	30	1025	(71)	34.8	(131.7)	3.5	(13.2)
	60	1000	(69)	69.7	(263.8)	7	(26.4)
	120	525	(36)	139.5	(528)	13.9	(52.6)

Texsteam Series 2500 chemical injection pumps are electric driven, positive displacement pumps utilizing C-faced motors and common gear reducers. The gear reducers are available in 15, 30, 60, and 120 strokes per minute configurations. By utilizing even further flexibility of a wide variety of plunger sizes, the Series 2500 can fill many application requirements of different flows and pressures.

The Series 2500 can have up to four, flow adjustable heads while running fluid ends.

OPTIONS: Ceramic plungers, which provide longer packing life, and a wide variety of packing are designed to meet the demands of many different chemical applications.

- Maximum discharge pressure: 6,000 psi (414 bar) with 3/16" plunger
- Maximum volume 139 gallons per day per head (528 liters per day) with 1/2" plunger
- Each head is adjustable while running
- Available simplex, duplex, triplex, or quadruplex configurations
- Mix or match head sizes – pump the same or different chemicals
- Available in four stroke rates: 15, 30, 60, or 120 strokes per minute
- Each head is independently coupled and easy to maintain in the field
- 1 or 3 phase, TEFC or explosion proof, 50 or 60 Hz motors available
- Available with 3/16", 1/4", 3/8", or 1/2" plunger

## Series 4300 Electric Driven Injection Pump




Plunger Size	Maximum Discharge Pressure		Maximum Volume Output @ Gear Ratio Gallons (Liters) per Day		
	psi	(bar)	100:1	50:1	25:1
3/16"	5,000	(344)	2.5 (9.5)	5 (19)	10 (37.8)
1/4"	2,400	(165)	5 (19)	10 (37.8)	20 (75.7)
3/8"	1,200	(83)	12 (45)	23 (87)	46 (174)
1/2"	600	(41)	21 (79.5)	40 (151)	80 (302.8)
3/4"	300	(20)	46 (174)	91 (345)	182 (689)
1"	150	(10)	81 (307)	163 (617)	325 (1,230)

The Series 300 pump utilizes an integral worm gear drive available in three different standard ratios and six plunger sizes to provide a wide selection of flows and pressures.

- Positive Displacement
- Up to 8 pumping heads driven by a single motor
- Each pumping head capacity is field adjustable 0 to 100% while running
- Oil bath lubrication for long gear box life

## Series 5000 Gas/Pneumatic Driven Injection Pump

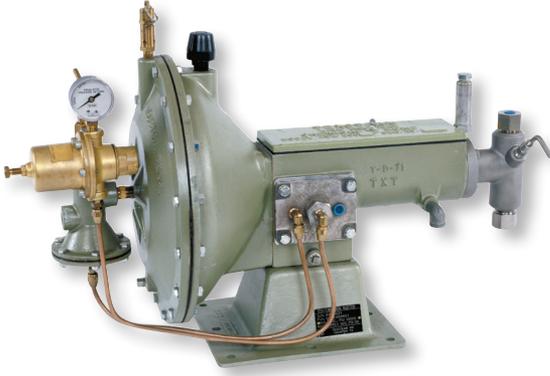

Plunger Size	Maximum Discharge Pressure		Maximum Volume Output Gallons (Liter) per Day
	psi	(bar)	
1/4"	10,000	(690)	16 (60.5)
3/8"	10,000	(690)	43 (162.7)
1/2"	10,000	(690)	85 (322)
3/4"	5,000	(344)	160 (605.7)
1"	3,000	(206)	320 (1,211)
1-1/4"	2,000	(138)	500 (1,892.7)

The Series 5000 pump is designed for high flow and high pressure applications.

- Pressure as high as 10,000 psi
- Designed for continuous operation
- Excellent for pumping chemicals, methanol, and corrosion inhibitors
- Field adjustable speed/volume control
- Simple modification can lower pumping rate to one stroke every five minutes
- Operates with air/gas pressures as low as 15 psi
- Trim for corrosive applications available
- Microswitch design available
- Regulator, gauges and tanks available as accessories

## Series 5100 Gas/Pneumatic Driven Injection Pump



Plunger Size	Maximum Discharge Pressure		Maximum Volume Output Gallons (Liters) per Day
	psi	(bar)	
3/16"	1,500	(103)	4.2 (16)
1/4"	1,500	(103)	7.5 (28.4)
3/8"	1,500	(103)	17 (64.3)
1/2"	1,500	(103)	32 (121)

NOTE: High pressure heads available to 6,000 psi

The Series 5100 pump is powered by gas/air via a diaphragm with a spring return. The pump offers two strokes for adjustable 1" or 1/3" lengths and flow rates.

- Direct acting
- Powered by diaphragm motor with spring return
- Field adjustable speed/volume control
- Operates with air/gas pressures as low as 8 psi
- Trim for corrosive applications available
- Micro switch design available
- Regulators, gauges and tanks available as accessories

## Series 6100 Gas/Pneumatic Driven Injection Pump Direct or Double Acting



Plunger Size	Maximum Discharge Pressure		Maximum Volume Output Gallons (Liters) per Minute
	psi	(bar)	
1-1/4"	9,000	(620)	1.5 (6)
2-3/4"	1,800	(124)	10 (37)
4"	900	(62)	20 (75)

The Series 6100 pump offers the highest flow rate, 20 gallons per minute, all the Texsteam chemical injection pumps. This pump is well-suited for offshore applications with its optional three part corrosive resistant paint system.

- Positive displacement pump
- Simplex or duplex offering
- Field adjustable speed/volume control
- Exhaust gas can be recovered to minimize gas consumption
- Heads made from cast steel or 316 stainless steel
- Minimum NPSHR - 8 feet of water
- Trim for corrosive applications available
- Regulators, gauges and manifold available as accessories

## Series 9000 Gas/Pneumatic Driven Double Diaphragm Utility Injection Pump



The Series 9000 pump is a heavy duty transfer pump capable of handling any liquid from alcohol to mud liquids containing solids 1/4" in diameter with ease and liquids containing abrasives with a minimum of wear.

- Can operate completely submerged
- Designed to pump liquids of various densities
- Air or gas operated at supply pressures from 5 to 100 psi
- Needs no priming for suction lifts up to 14-feet of water without foot valve and to 29-feet of water with foot valve
- Features strong handle, sturdy base, a power control valve for close discharge volume control and a power air safety valve
- Furnished with or without reservoirs

# Series MXG Gas/Pneumatic Driven Injection Pump

The Series MXG pump offers lightweight design with powerful performance. Weighing less than 10 lbs., it is capable of handling discharge pressures as high as 10,000 psi while consuming half the gas used by standard pneumatic pumps.



- Adjustable flow rate
- Positive cycle operation
- Easily field serviceable
- 316 SS fluid end
- 1 to 60 strokes/minute
- Simplex or duplex offering
- Can be mounted vertically or horizontally
- Up to 62 gallons (235 liters) per day
- Discharge pressures to 10,000 psi (690 bar)
- Differential pressure: 250 psi (17 bar) maximum  
30 psi (2.1 bar) minimum

Model Number	Plunger Size	Maximum Discharge Pressure		Volume Gallons (Liters) per Day	
		psi	(bar)	Maximum	Minimum
MX3-4	3/16"	10,000	(690)	8 (30.3)	0.11 (0.42)
MX3-1	1/4"	10,000	(690)	14.5 (54.9)	0.2 (0.75)
MX3-3	3/8"	6,000	(414)	32.1 (121.5)	0.6 (2.27)
MX3-5	1/2"	3,500	(241)	62 (234.7)	1.1 (4.16)


# Series MX-5 Gas/Pneumatic Driven Injection Pump

The Series MX5 is a heavy duty, lightweight pump capable of pumping up to 830 gallons per day. It uses half the gas or air of a standard pneumatic pump to reach discharge pressures as high as 10,000 psi.

- Adjustable packing
- Easily field serviceable
- 1 to 60 strokes per minute
- Simplex or duplex offering
- Differential pressure: 145 psi (10 bar) maximum  
30 psi (2.1 bar) minimum



Model Number	Plunger Size	Maximum Discharge Pressure		Volume Gallons (Liters) per Day per Head	
		psi	(bar)	Maximum	Minimum
MX5-5	1/2"	10,000	(690)	137 (518)	8 (30)
MX5-6	3/4"	5,500	(379)	310 (1173)	50 (189)
MX5-7	1"	3,100	(214)	550 (2082)	100 (378)
MX5-8	1-1/4"	2,000	(138)	830 (3142)	300 (1136)

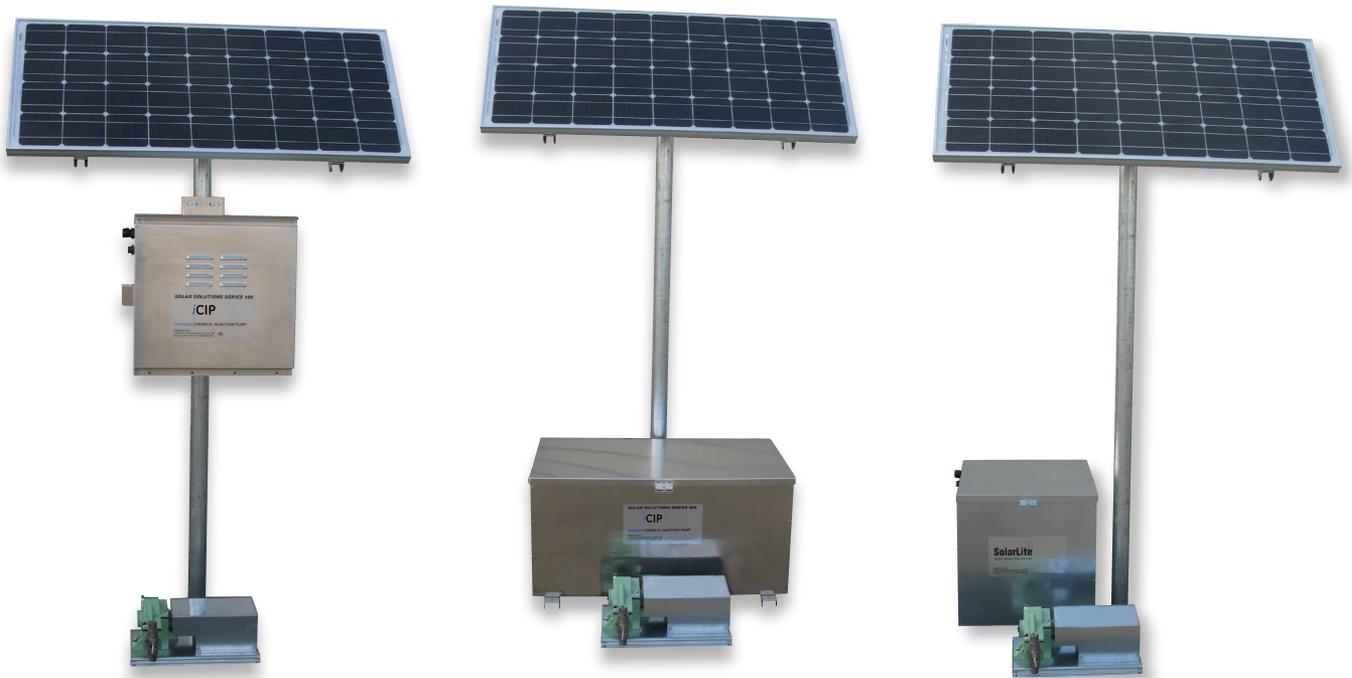

## Solar Solutions iCIP and HiCIP Intelligent Chemical Injection Pumps

The iCIP and HiCIP pumps are solar-powered chemical injection pumps based on the proven Texsteam 2200 series pump design, and using its packing and plunger technology.

- Zero emissions chemical injection pump
- Ideal for remote locations – does not require on-site power source
- Wide variety of volume and pressure capabilities
- Microprocessor based programmable controller
- Continuous injection provides even dispersion of chemical
- System protections – utilize fault management system
  - Low battery shutdown, motor overload protection and others
  - Fuse protection
- Certified and approved to CSA (Canada) and UL (USA) standards:
  - Class I Division II – Groups C & D
  - Class I Division I – Groups C & D (motor)
- NEMA 3R battery enclosure that houses control panel and batteries
- Quiet operations
- 24 month system warranty



## Texsteam SolarLite Chemical Injection Pump

The Texsteam SolarLite pump is an economical solar-powered chemical injection pump that offers high pressure shutdown to prevent motor overload and provides low battery protection.

- Dial controlled, variable speed capability to adjust flow rate by turning one simple knob
- High efficiency brushed DC gear motor or brushless DC gear motor
- High torque performance response as pressure fluctuates, pump speed remains constant
- Continuous injection provides even dispersion of chemical
- 3 controller indicator lights: Power, Motor Run/Stop, Fault
- Fusible protection at the battery connections
- Certified and approved to CSA (Canada) and UL (USA) standards: Class I Division II Groups C & D
- Same pump unit as iCIP pump - 2200 series pump design utilizing Texsteam packing and plunger technology with years of proven reliability
- 316 SS heads standard, available in four head sizes: 3/16", 1/4", 3/8", and 1/2"
- Wide variety of available packing and o-ring materials for chemical compatibility
  - New SDP packing technology to solve all your compatibility problems
- Duplex pump-end configurations available (consult factory)
  - Both heads available with stroke adjustment option
- Lockable battery enclosure
- Available options and accessories
  - Temperature thermostat for methanol applications
  - On/Off switch
  - Lockout key switch
  - Alternative power supply - 110 AC to 12 VDC or 24 VDC to 12 VDC
- Complete package with all required components
- Standard Texsteam Pump warranty



## Multipoint Injection Controller

The Texsteam multipoint injection controller is used in oil and gas wellhead chemical injection operations to distribute chemicals from a single chemical injection pump to multiple injection points. The Multipoint offers increased flexibility by distributing different flow rates to various endpoints with one pump head and one injection controller.

The Explosion-Proof (NEMA 7) Texsteam Multipoint works to a maximum operating pressure of 2500 psi with 10W power consumption. It works in conjunction with Class I and II Groups C, D, E, F & G, Division 1 and 2 valves and can be used with the iCIP™ Solar and iCIP™ A/C packages.

- Up to 4 injection points
- 2500 psi max working pressure
- Individual point flowrate range is 0.09 quarts/day - 266 quarts/day, depending on pump head and iCIP motor configuration.
- Standard Buna/Teflon valve seals. Other materials may be used as required.
- ¼" NPT pipe connections
- 10W power consumption
- Class I and II Groups C, D, E, F & G, Division 1 and 2 Valves
- Used with the Class 1, Division 2 iCIP™ Solar and iCIP™ A/C packages
- Optional line checks
- Optional pressure relief valve

ICIP MultiPoint - % Solenoid Adjustment Flow rate

	3/16" Head					1/4" Head					38" Head					1/2" Head				
	Low Qts/Day	High Qts/Day	Low L/Day	High L/Day	Max PSI	Low Qts/Day	High Qts/Day	Low L/Day	High L/Day	Max PSI	Low Qts/Day	High Qts/Day	Low L/Day	High L/Day	Max PSI	Low Qts/Day	High Qts/Day	Low L/Day	High L/Day	Max PSI
	1.75	26.31	1.66	24.87	2500	3.07	46.07	2.91	43.61	2500	11.52	103.68	10.90	98.12	2500	20.48	184.29	19.38	174.43	2500
5%	0.09	1.32	0.08	1.24	2500	0.15	2.30	0.15	2.18	2500	0.58	5.18	0.55	4.91	2500	1.02	9.21	0.97	8.72	2500
10%	0.18	2.63	0.17	2.49	2500	0.31	4.61	0.29	4.36	2500	1.15	10.37	1.09	9.81	2500	2.05	18.43	1.94	17.44	2500
15%	0.26	3.95	0.25	3.73	2500	0.46	6.91	0.44	6.54	2500	1.73	15.55	1.64	14.72	2500	3.07	27.64	2.91	26.16	2500
20%	0.35	5.26	0.33	4.97	2500	0.61	9.21	0.58	8.72	2500	2.30	20.74	2.18	19.62	2500	4.10	36.86	3.88	34.89	2500
25%	0.44	6.58	0.42	6.22	2500	0.77	11.52	0.73	10.90	2500	2.88	25.92	2.73	24.53	2500	5.12	46.07	4.85	43.61	2500
30%	0.53	7.89	0.50	7.46	2500	0.92	13.82	0.87	13.08	2500	3.46	31.10	3.27	29.44	2500	6.14	55.29	5.81	52.33	2500
35%	0.61	9.21	0.58	8.70	2500	1.07	16.12	1.02	15.26	2500	4.03	36.29	3.82	34.34	2500	7.17	64.50	6.78	61.05	2500
40%	0.70	10.52	0.66	9.95	2500	1.23	18.43	1.16	17.44	2500	4.61	41.47	4.36	39.25	2500	8.19	73.72	7.75	69.77	2500
45%	0.79	11.84	0.75	11.19	2500	1.38	20.73	1.31	19.62	2500	5.18	46.66	4.91	44.15	2500	9.22	82.93	8.72	78.49	2500
50%	0.88	13.16	0.83	12.44	2500	1.54	23.04	1.46	21.81	2500	5.76	51.84	5.45	49.06	2500	10.24	92.15	9.69	87.22	2500
55%	0.96	14.47	0.91	13.68	2500	1.69	25.34	1.60	23.99	2500	6.34	57.02	6.00	53.97	2500	11.26	101.36	10.66	95.94	2500
60%	1.05	15.79	1.00	14.92	2500	1.84	27.64	1.75	26.17	2500	6.91	62.21	6.54	58.87	2500	12.29	110.57	11.63	104.66	2500
65%	1.14	17.10	1.08	16.17	2500	2.00	29.95	1.89	28.35	2500	7.49	67.39	7.09	63.78	2500	13.31	119.79	12.60	113.38	2500
70%	1.23	18.42	1.16	17.41	2500	2.15	32.25	2.04	30.53	2500	8.06	72.58	7.63	68.68	2500	14.34	129.00	13.57	122.10	2500
75%	1.31	19.73	1.25	18.65	2500	2.30	34.55	2.18	32.71	2500	8.64	77.76	8.18	73.59	2500	15.36	138.22	14.54	130.82	2500
80%	1.40	21.05	1.33	19.90	2500	2.46	36.86	2.33	34.89	2500	9.22	82.94	8.72	78.50	2500	16.38	147.43	15.50	139.54	2500
85%	1.49	22.36	1.41	21.14	2500	2.61	39.16	2.47	37.07	2500	9.79	88.13	9.27	83.40	2500	17.41	156.65	16.47	148.27	2500
90%	1.58	23.68	1.49	22.38	2500	2.76	41.46	2.62	39.25	2500	10.37	93.31	9.81	88.31	2500	18.43	165.86	17.44	156.99	2500
95%	1.66	24.99	1.58	23.63	2500	2.92	43.77	2.76	41.43	2500	10.94	98.50	10.36	93.21	2500	19.46	175.08	18.41	165.71	2500
100%	1.75	26.31	1.66	24.87	2500	3.07	46.07	2.91	43.61	2500	11.52	103.68	10.90	98.12	2500	20.48	184.29	19.38	174.43	2500

ICIP High Efficiency MultiPoint - % Solenoid Adjustment Flow rate

	3/16" Head					1/4" Head					38" Head					1/2" Head				
	Low Qts/Day	High Qts/Day	Low L/Day	High L/Day	Max PSI	Low Qts/Day	High Qts/Day	Low L/Day	High L/Day	Max PSI	Low Qts/Day	High Qts/Day	Low L/Day	High L/Day	Max PSI	Low Qts/Day	High Qts/Day	Low L/Day	High L/Day	Max PSI
	2.90	38.00	2.80	35.90	2500	5.10	66.60	4.80	63.00	2500	11.50	149.80	10.90	141.70	2500	20.50	266.20	19.40	252.20	2500
5%	0.15	1.90	0.14	1.80	2500	0.26	3.33	0.24	3.15	2500	0.58	7.49	0.55	7.09	2500	1.03	13.31	0.97	12.61	2500
10%	0.29	3.80	0.28	3.59	2500	0.51	6.66	0.48	6.30	2500	1.15	14.98	1.09	14.17	2500	2.05	26.62	1.94	25.22	2500
15%	0.44	5.70	0.42	5.39	2500	0.77	9.99	0.72	9.45	2500	1.73	22.47	1.64	21.26	2500	3.08	39.93	2.91	37.83	2500
20%	0.58	7.60	0.56	7.18	2500	1.02	13.32	0.96	12.60	2500	2.30	29.96	2.18	28.34	2500	4.10	53.24	3.88	50.44	2500
25%	0.73	9.50	0.70	8.98	2500	1.28	16.65	1.20	15.75	2500	2.88	37.45	2.73	35.43	2500	5.13	66.55	4.85	63.05	2500
30%	0.87	11.40	0.84	10.77	2500	1.53	19.98	1.44	18.90	2500	3.45	44.94	3.27	42.51	2500	6.15	79.86	5.82	75.66	2500
35%	1.02	13.30	0.98	12.57	2500	1.79	23.31	1.68	22.05	2500	4.03	52.43	3.82	49.60	2500	7.18	93.17	6.79	88.27	2500
40%	1.16	15.20	1.12	14.36	2500	2.04	26.64	1.92	25.20	2500	4.60	59.92	4.36	56.68	2500	8.20	106.48	7.76	100.88	2500
45%	1.31	17.10	1.26	16.16	2500	2.30	29.97	2.16	28.35	2500	5.18	67.41	4.91	63.77	2500	9.23	119.79	8.73	113.49	2500
50%	1.45	19.00	1.40	17.95	2500	2.55	33.30	2.40	31.50	2500	5.75	74.90	5.45	70.85	2500	10.25	133.10	9.70	126.10	2500
55%	1.60	20.90	1.54	19.75	2500	2.81	36.63	2.64	34.65	2500	6.33	82.39	6.00	77.94	2500	11.28	146.41	10.67	138.71	2500
60%	1.74	22.80	1.68	21.54	2500	3.06	39.96	2.88	37.80	2500	6.90	89.88	6.54	85.02	2500	12.30	159.72	11.64	151.32	2500
65%	1.89	24.70	1.82	23.34	2500	3.32	43.29	3.12	40.95	2500	7.48	97.37	7.09	92.11	2500	13.33	173.03	12.61	163.93	2500
70%	2.03	26.60	1.96	25.13	2500	3.57	46.62	3.36	44.10	2500	8.05	104.86	7.63	99.19	2500	14.35	186.34	13.58	176.54	2500
75%	2.18	28.50	2.10	26.93	2500	3.83	49.95	3.60	47.25	2500	8.63	112.35	8.18	106.28	2500	15.38	199.65	14.55	189.15	2500
80%	2.32	30.40	2.24	28.72	2500	4.08	53.28	3.84	50.40	2500	9.20	119.84	8.72	113.36	2500	16.40	212.96	15.52	201.76	2500
85%	2.47	32.30	2.38	30.52	2500	4.34	56.61	4.08	53.55	2500	9.78	127.33	9.27	120.45	2500	17.43	226.27	16.49	214.37	2500
90%	2.61	34.20	2.52	32.31	2500	4.59	59.94	4.32	56.70	2500	10.35	134.82	9.81	127.53	2500	18.45	239.58	17.46	226.98	2500
95%	2.76	36.10	2.66	34.11	2500	4.85	63.27	4.56	59.85	2500	10.93	142.31	10.36	134.62	2500	19.48	252.89	18.43	239.59	2500
100%	2.90	38.00	2.80	35.90	2500	5.10	66.60	4.80	63.00	2500	11.50	149.80	10.90	141.70	2500	20.50	266.20	19.40	252.20	2500

## Texsteam Pump Portfolio

		25		100		200		500				1000													
		24		72		120		168		240		720		1200		2400		24000							
		8		20		32		40		200		400		2000		4000		6000		8000					
		0	1	2	3	4	5	6	7	8	9	10	20	30	40	50	60	70	80	90	100	500	1000	1500	2000
	<b>Beam 1200</b>	Maximum Pressure 3,000 PSI (207 Bar)		Minimum Flow Rate 0.01 Q/H (0.01 L/H)(.06 G/D) Maximum Flow Rate (Duplex) 1.25 Q/H (1.2 L/H)(7.5 G/D)																					
	<b>Pneumatic 5100</b>	Maximum Pressure 6,000 PSI (413 Bar)		Minimum Flow Rate 0.05 Q/H (0.05 L/H)(0.3 G/D) Maximum Flow Rate 5.3 Q/H (5.0 L/H)(31.8 G/D)																					
	<b>Electric 2200</b>	Maximum Pressure 1,000 PSI (69 Bar)		Minimum Flow Rate 0.1 Q/H (0.34 L/H)(2.2 G/D) Maximum Flow Rate (Duplex) 20.5 Q/H (19.4 L/H)(123 G/D)																					
	<b>Solar SolarLite®</b>	Maximum Pressure 5,000 PSI (345 Bar)		Minimum Flow Rate 0.12 Q/H (0.11 L/H)(0.73 G/D) Maximum Flow Rate (Duplex) 15.36 Q/H (14.5 L/H)(92.2 G/D)																					
	<b>Pneumatic MXG</b>	Maximum Pressure 10,000 PSI (690 Bar)		Minimum Flow Rate 0.02 Q/H (0.02 L/H)(0.11 G/D) Maximum Flow Rate (Duplex) 20.7 Q/H (19.6 L/H)(124 G/D)																					
	<b>Solar iCIP®</b>	Maximum Pressure 7,000 PSI (482 Bar)		Minimum Flow Rate 0.07 Q/H (0.07 L/H)(0.42 G/D) Maximum Flow Rate (Triplex) 33.3 Q/H (31.5 L/H)(199.8 G/D)																					
	<b>Pneumatic 5000</b>	Maximum Pressure 12,000 PSI (827 Bar)		Minimum Flow Rate 0.11 Q/H (0.11 L/H)(0.68 G/D) Maximum Flow Rate 83.3 Q/H (78.8 L/H)(499.8 G/D)																					
	<b>Electric 2500</b>	Maximum Pressure 6,000 PSI (414 Bar)		Minimum Flow Rate 0.03 Q/H (0.03 L/H)(0.2 G/D) Maximum Flow Rate (Quadplex) 93 Q/H (88 L/H)(558 G/D)																					
	<b>Electric 4300</b>	Maximum Pressure 5,000 PSI (345 Bar)		Minimum Flow Rate 0.01 Q/H (0.01 L/H)(0.063 G/D) Maximum Flow Rate (Octplex) 432.9 Q/H (409.7 L/H)(2,597 G/D)																					
	<b>Pneumatic MX5</b>	Maximum Pressure 10,000 PSI (690 Bar)		Minimum Flow Rate 4.1 Q/H (3.9 L/H)(24.6 G/D) Maximum Flow Rate (Duplex) 500.9 Q/H (474.0 L/H)(3,005 G/D)																					
	<b>Electric 2400</b>	Maximum Pressure 4,000 PSI (276 Bar)		Minimum Flow Rate 1.2 Q/H (1.1 L/H)(7.2 G/D) Maximum Flow Rate (Quadplex) 586.7 Q/H (555.2 L/H)(3,520 G/D)																					
	<b>Pneumatic 6100</b>	Maximum Pressure 9,000 PSI (621 Bar)		Minimum Flow Rate 68.8 Q/H (65.1 L/H)(413 G/D) Maximum Flow Rate (Duplex) 9,510 Q/H (9,000 L/H)(57,000 G/D)																					
	<b>Pneumatic 9000</b>	Maximum Pressure 60 PSI (4.1 Bar)		Minimum Flow Rate 240 Q/H (227 L/H)(1440 G/D) Maximum Flow Rate 14,400 Q/H (13,627 L/H)(86,400 G/D)																					

## Continuing A Legacy

The more things change, the more they stay the same...

Since 1938, TEXSTEAM™ has been delivering quality chemical injection solutions to the oil and gas industry. Today, the TEXSTEAM™ name is synonymous world-wide with quality and durability.



**Texsteam Pumps**  
16240 Port Northwest Drive  
Houston, TX 77041  
T: 832-590-2306  
Toll Free: 1-800-945-9898  
F: 713-849-2879

© 2021 Natural Gas Solutions North America, LLC – All rights reserved. Dresser Utility Solutions reserves the right to make changes in specifications and features shown herein, or discontinue the product described at any time without notice or obligation. Contact your Dresser Utility Solutions representative for the most current information. The Dresser Logo and all Trademarks containing the term "Dresser" are the property of Dresser, LLC, a subsidiary of Baker Hughes.



[www.dresserutility.com](http://www.dresserutility.com)

Texsteam Pumps Catalogue NGS.IPG.0001c

08.21