

# Series 5100

## Chemical Injection Pumps

### Air or gas driven injectors



**Series 5100 LP**  
Wt. 45 pounds (20.4 kg)

**Microswitch Option Available**

### Description

Dresser Natural Gas Solutions 5100 Series Texsteam Chemical Injectors are single acting, positive displacement plunger-type pumps, powered by gas via a diaphragm with a spring return. Speed control is accomplished by regulating the exhaust gas discharge flow. Reversal is accomplished by a direct spring-actuated switching mechanism (rotary three-way valve). Volume is controlled by the speed of the pump and by the stroke length, either 1" (25.4 mm) or 1/3" (8.5 mm) lengths.

The 5100 Series is capable of pumping high pressures with gas pressure as low as 8 psig (0.6 bar) and handling volume output up to 30 gallons (113 liters) per day.

The pump is lightweight, compact and contains a minimum of working parts for easy maintenance. Each fluid pump head is equipped with a stainless steel plunger, ball checks, ball check springs, top seat, top bushing, bottom bushing, adjustable VEE type packing and a priming valve. The packing yoke is equipped with a drain to monitor for possible packing leaks. Because of the sealed bearings, the unit is oil-less.

The 5100 Series performs accurately because: (1) the head is designed for high volumetric efficiency; (2) a positive trip mechanism provides fine control of plunger stroke length; and (3) the speed is regulated by controlling the exhaust gas discharge flow which creates a rapid fluid discharge with slow suction.

### Performance

Plunger Size in (mm)	Maximum Discharge Pressure psig (bar)	GPD = gallons per day LPD = liters per day	
		For Operation Off Air or Gas Pressure to 33 psig (2.3 bar) Constant	
		Pressure Unit <sup>1</sup>	
5100 Series (Standard Packing)		Model Number	Maximum Volume GPD (LPD)
3/16" (4.763)	3000 (206.8)	5104	4.2 (15.9)
1/4" (6.35)	3000 (206.8)	5101	7.5 (28.4)
3/8" (9.525)	3000 (206.8)	5103	16.8 (63.6)
1/2" (12.70)	3000 (206.8)	5105	32.0 (121.1)
(High Pressure Packing)		Model Number	Maximum Volume GPD (LPD)
3/16" (4.763)	6000 (413.7)	5104	2.8 (10.6)
1/4" (6.35)	6000 (413.7)	5101	5.0 (18.9)
3/8" (9.525)	6000 (413.7)	5103	12.0 (45.4)
1/2" (12.70)	3500 (241.3)	5105	22.0 (83.3)

1. Basic pump no tank, base, regulator, gauge (shipping weight: 45 lbs (20.4 kg)).

This pump has ATEX certification from TÜV Rheinland.


### Application

- The introduction of de-emulsifiers, solvents, corrosion inhibitors, de-salting agents and flocculants in oil country operation
- High pressure bearing lubrication
- Water treatment
- Blending processes in refining and process plants
- Injection of methanol in gas pipelines
- Hydrostatic testing
- Sampling

# Gas Consumption Charts

(Standard Cubic Feet of Gas Required to Pump One Gallon)

Injection Press in psig		100	200	500	1000	1500	2000	3000	3500	4000	5000	6000
1/2" Plunger 1" Stroke	5105	53	54	57	62	71	76	84	95			
		159	162	171	186	213	228	252	285			
3/8" Plunger 1" Stroke	5103	120	126	148	164	177	185	243	278	314	355	374
		360	378	444	492	531	555	729	834	942	1065	1122
1/4" Plunger 1" Stroke	5101	244	245	248	270	288	308	340	355	369	405	497
		732	735	744	810	864	924	1020	1065	1107	1215	1491
3/16" Plunger 1" Stroke	5104	457	458	462	469	476	530	545	555	560	575	589
		1371	1374	1386	1407	1428	1590	1635	1665	1680	1725	1776

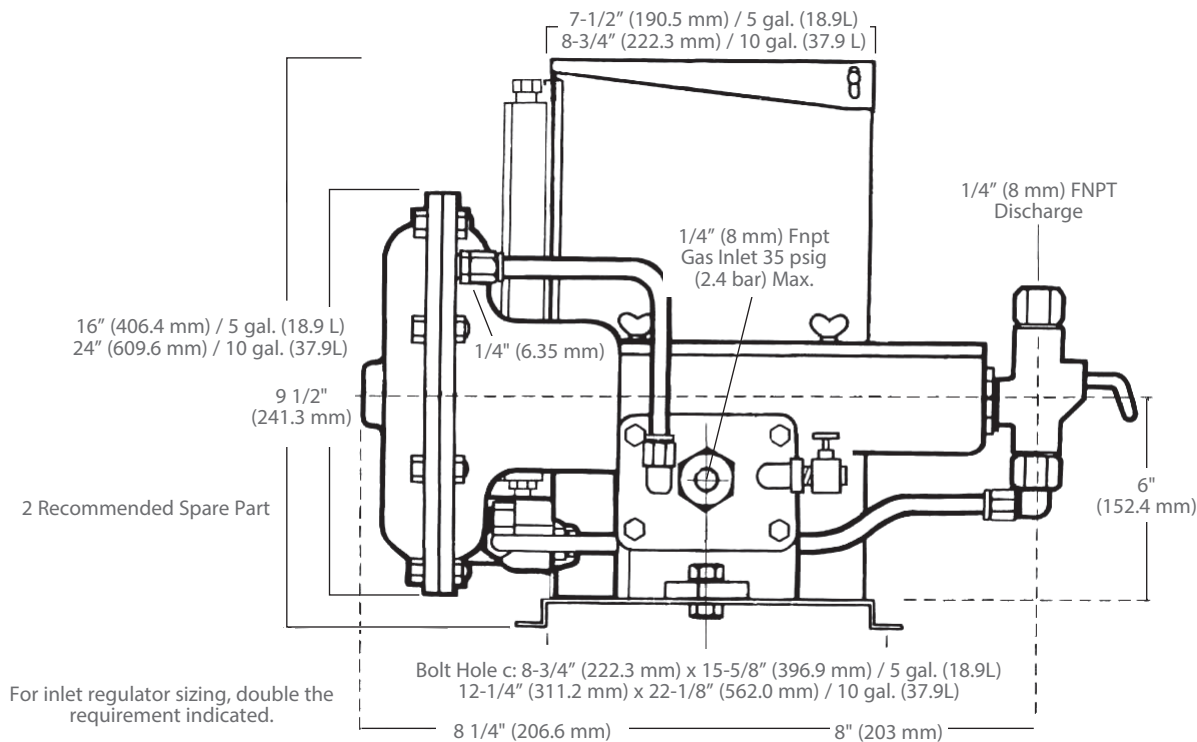

(Standard Cubic Meters of Gas Required to Pump One Liter)

Injection Pressure (bar)		6.9	13.8	34.5	68.9	103.4	137.9	206.8	241.3	275.8	344.7	413.7
12.7 mm Plunger 25.4 mm Stroke	5105	0.40	0.40	0.43	0.46	0.53	0.57	0.63	0.71			
		1.19	1.21	1.28	1.39	1.59	1.71	1.89	2.13			
9.525 mm Plunger 25.4 mm Stroke	5103	0.90	0.94	1.11	1.23	1.32	1.38	1.82	2.08	2.35	2.66	2.80
		2.69	2.83	3.32	3.68	3.97	4.15	5.45	6.24	7.05	7.97	8.39
6.35 mm Plunger 25.4 mm Stroke	5101	1.83	1.83	1.86	2.02	2.15	2.30	2.54	2.66	2.76	3.03	3.72
		5.48	5.50	5.57	6.06	6.46	6.91	7.63	7.97	8.28	9.09	11.15
4.763 mm Plunger 25.4 mm Stroke	5104	3.42	3.43	3.46	3.51	3.56	3.96	4.08	4.15	4.19	4.30	4.41
		10.26	10.28	10.37	10.53	10.68	11.89	12.23	12.45	12.57	12.90	13.29

## Texsteam Pumps

16240 Port Northwest Drive

Houston, TX 77041

T: 832-590-2306

Toll Free: 1-800-945-9898

F: 713-849-2879



www.dresserutility.com

The Dresser Logo and all Trademarks containing the term "Dresser" are the property of Dresser, LLC, a subsidiary of Baker Hughes.

Texsteam 5100 Series Fact Sheet NGS.IPG.0007a