


TPS Abandoned Corporation Fittings


BENEFITS:

- » 3" and 4" Domed Outlets
- » Covers any corporation stops in pipe diameters from 4" to 16"
- » Additional sizes available up to 48"
- » Full gasket coverage to limit contact of dissimilar pipe materials
- » Branch gasket provides extra positive seal on mainline
- » Allows for termination lead service line corporation valve with minimal disruption



Technical Specifications

Size	Range
4" u.s.	4.45 - 5.13
4" o.s.	4.74 - 5.61
6" u.s.	6.55 - 7.42
6" o.s.	6.84 - 7.65
8" u.s.	8.54 - 9.44
8" o.s.	8.98 - 9.84
10" u.s.	10.64 - 11.46
10" o.s.	11.34 - 12.16
12" u.s.	12.62 - 13.56
12" o.s.	13.65 - 14.42
14" u.s.	15.22 - 16.16
14" o.s.	16.18 - 16.92
16" u.s.	17.25 - 18.18
16" o.s.	18.42 - 19.23

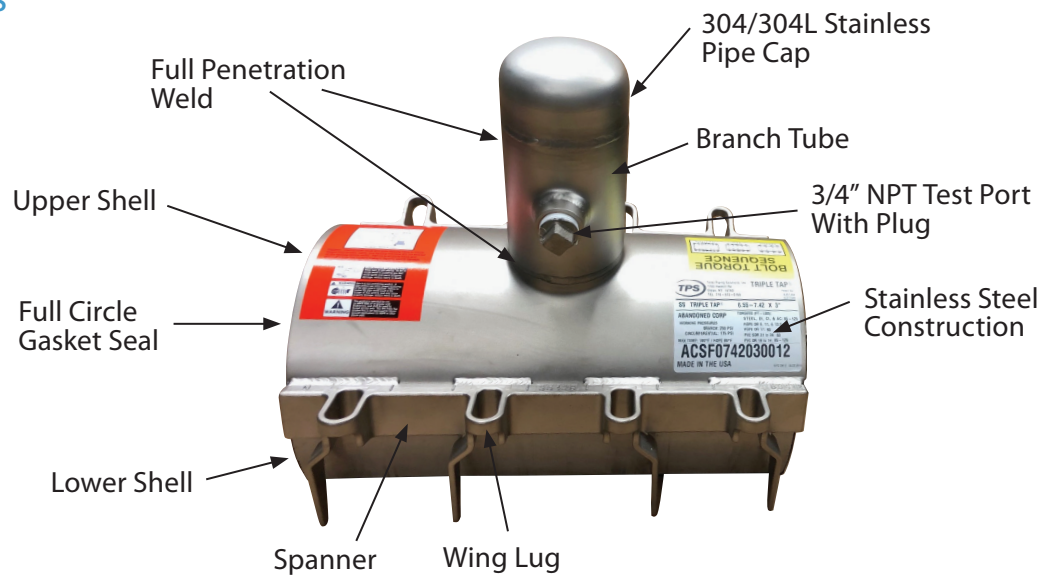

Specifications

Pressure Rating: Maximum working pressure up to 250 psi, qualification tested to 1.5x working pressure (up to 375psi) and is determined by the actual diameter of the pipe

Temperature Rating: 80" maximum continuous working temperature

Gasket Material: NSF-61 Approved NBR Rubber – For Water Service (EPDM available upon request)

Shell: Heavy duty type 304 Stainless Steel, fully passivated for corrosion protection

Alignment Lugs: Heavy Duty Cast Type 304, 18-8 Stainless Steel permanently welded fused to band with integrated handle for ease of assembly

Bolts/Nuts/Washers: Type 304 Stainless steel, Bolt threads 5/8" Rolled, with fluoropolymer coating to prevent galling

Branch: 3" and 4" type 304 18-8 Stainless Steel branch sizes with 3/4" NPT test port with plug



Dresser Pipeline Solutions
 1760 Haskell Road
 Olean, NY 14760
 P: 716-372-0160
 F: 716-372-1767
www.dresserutility.com/water

