



# TPS SERIES T3™



**Reduced  
Inventory**



**Easy to  
Install**




**Universal  
Pipe Types**

Wide Range Service Saddle  
Extended Range Universal Service Saddle

The Series T3 Service Saddle is the latest in our series of innovative products that save time, labor and inventory dollars in the water and wastewater piping industries.

- » Now Available in 316 Stainless Steel
- » Fewer Sizes, Less Inventory = More with Less

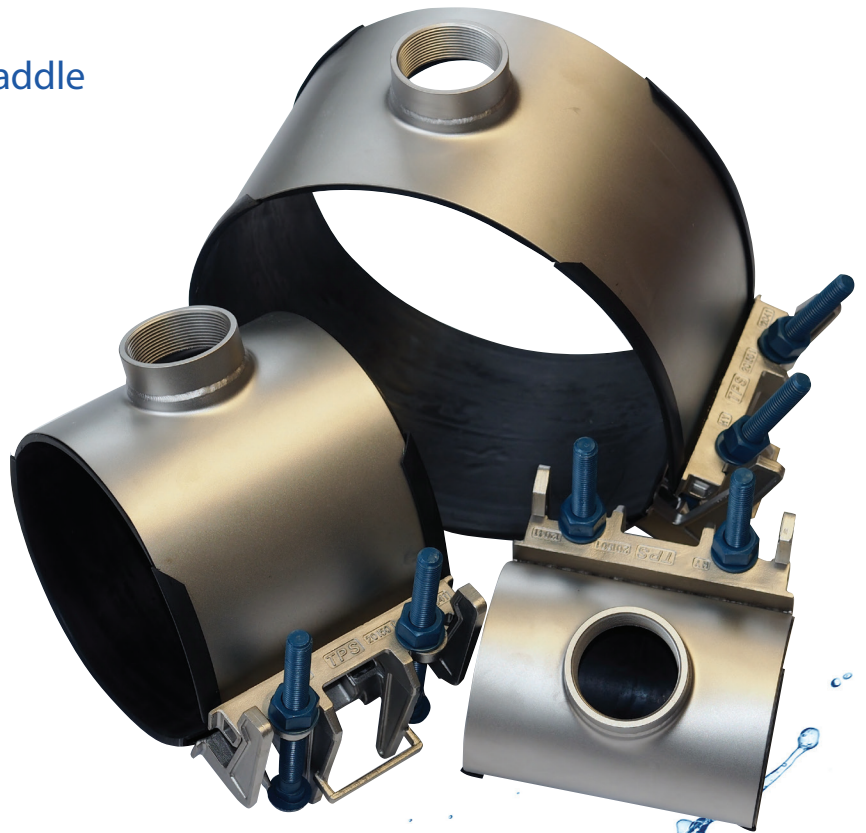

The Series T3 is a unique wide range Universal Type 304 Stainless Steel Service Tapping Product that may be used on all types of pipe including: ductile iron, cast iron, PVC, asbestos cement, steel and HDPE.

The Series T3 is a unique wide range Universal Type 304 Stainless Steel Service Tapping Product that may be used on all types of pipe including: ductile iron, cast iron, PVC, asbestos cement, steel and HDPE. This substantially reduces the need for extra on-hand sizes to accommodate various pipe materials found in local distribution systems requirements when performing service line taps. The Series T3 exceeds all industry standards including AWWA C800; sizes 10" and above are equipped with an insulating boot that prevents contact with the pipe and reduces the potential for corrosion when used on ferrous pipe materials.



Integrated Handle for ease of installation

Since the Series T3 may be used on all pipe materials with the ability to cut saddle inventory by over 70%, it is a suitable candidate to replace multiple services saddles made from various materials such as brass, ductile iron and plastic as well as a selection of other stainless steel saddle versions.

Patent Pending Cam Lug Fingers for Extended Range

### Unique patented extended range Cam Lug System.

U.S. Patent Numbers 9,970,584 and 10,544,894.

The user friendly lug system, with built in handle enables one product to carry over twice the range of a standard saddle, allowing for inventory reduction and simplification of the installation process. The outlet design features a stronger spin-extruded branch with higher strength welds to resist threaded service valve installation torque and fatigue cracking.

### T3 EXCLUSIVE:

**Single Panel** design from 2" up to and including 16" Nominal up to 250 psi

**Double Panel** design from 18" up to and including 24" Nominal up to 200 psi 30" up to and including 36" Nominal up to 150 psi

**Triple Panel** design from 42" up to and including 48" Nominal up to 125 psi  
Now available in 316 stainless Steel with 2" NPT Outlets for use on PRV Service



Optional Removable Lugs

### Specifications



**Pressure Rating:** Up to 250 PSI Maximum Working Pressure depending on diameter, Call factory for additional information

**Temperature Rating:** Maximum Continuous Working Temperature range of 180°F

**Gasketing:** NSF-61 Approved NBR Rubber – For Water Service (EPDM Available upon Request)

**Shell:** Heavy Duty 14, 18 or 20 gauge band (depending on diameter) of Type 304, 18-8 Stainless Steel, Fully Passivated for Corrosion Protection. Shell band widths are 7-1/2" on 4" to 16" and 10" widths on 18" to 48" diameters

**Alignment Lugs:** Heavy Duty Cast Type 304, 18-8 Stainless Steel permanently welded fused to band with integrated handle for ease of assembly, removable lugs available upon request

**Branch Connections:** Type 304 18-8 Stainless Steel Thread-O-Lets available in 1/2" to 2" in diameter

**Outlets:** Type 304, 18-8 Stainless Steel available in either "CC" or "NPT" thread pitches

**Band Insulating Boot:** EPDM Rubber

**Bolts/Nuts/Washers:** Type 304 Stainless steel, Bolt threads 5/8" Rolled, coated with Fluoropolymer Coating to prevent galling

NOTE: Product pressure rating, temperature rating and bolt torque can vary depending on the product diameter, type of connection, and the pipe material being utilized. The pressure rating, temperature rating, and bolt torque shown on the product label are the actual ratings of the individual product.

Note: For Sewerage Applications product is available in 316 Stainless Steel construction with 2" NPT Outlets. For this application always contact customer service rep.

For Corrosive or Hot Soil Conditions a grade of Stainless higher than Type 304 may be Required. Please consult with your piping engineering for guidance.

## Technical Specifications

Nom. Diam.	Lower Diam.	Upper Diam.	Connection Sizes	CTS	IPS	DI	Pit Cast	AC100	AC150	AC200
2	2.10	2.40	1/2 to 1"	2.13	2.38		2		2	
2	2.35	2.65	1/2 to 1.5"		2.38		2.5			
3	3.10	3.30	1/2 to 1.5"	3.13						
3	3.30	3.60	1/2 to 1.5"		3.50					
3	3.79	4.13	1/2 to 2"	4.13			3.96			
3	4.01	4.41	1/2 to 2"	4.13					4.18	
4	4.45	5.13	1/2" to 2"	5.13	4.50	4.80	5.00			
4 o.s.	4.74	5.61	1/2" to 2"			4.80	5.00	5.26	5.32	5.57
5	5.50	6.20	1/2" to 2"	6.13	5.56					5.57
6	6.55	7.42	1/2" to 2"		6.63	6.90	7.10	7.40	7.37	
6 o.s.	6.84	7.65	1/2" to 2"			6.90	7.10	7.40	7.37	7.60
8	8.54	9.44	1/2" to 2"		8.63	9.05	9.30			
8 o.s.	8.98	9.84	1/2" to 2"			9.05	9.30	9.57	9.62	9.79
10	10.64	11.46	1/2" to 2"		10.75	11.10	11.40			
10 o.s.	11.34	12.16	1/2" to 2"				11.40	11.77	12.12	12.12
12	12.62	13.56	1/2" to 2"		12.75	13.20	13.50			
12 o.s.	13.65	14.42	1/2" to 2"		14.00			14.04	14.38	14.38
14	15.22	16.16	1/2" to 2"		16.00	15.30	15.65	15.80		
14 o.s.	16.18	16.92	1/2" to 2"						16.73	16.88
16	17.25	18.18	1/2" to 2"		18.00	17.40	17.80	17.94		
16 o.s.	18.42	19.23	1/2" to 2"						18.97	19.19
18	19.32	21.04	1/2" to 2"		20.00	19.50	19.92	19.90	20.94	
18 o.s.	21.10	22.80	1/2" to 2"			21.60	22.06		21.30	22.54
20	23.20	25.10	1/2" to 2"		24.00			23.64		25.02
24	25.60	27.30	1/2" to 2"			25.80	26.32	27.17		
24 o.s.	27.80	29.70	1/2" to 2"					28.32	29.62	
30	29.70	30.30	1/2" to 2"		30.00					29.98
30 o.s.	31.96	32.46	1/2" to 2"			32.00	32.40			
36	35.80	36.20	1/2" to 2"		36.00					
36 o.s.	38.10	38.50	1/2" to 2"			38.30				
42	44.30	44.70	1/2" to 2"			44.50				
48	50.60	51.00	1/2" to 2"			50.80				

## Applicable Standards and Product Cautions:

**ASTM A380-06** Standard Practice for Cleaning Descaling and Passivation of Stainless Steel Parts Equipment and Systems

**ASTM A967-05** Standard Specification for Chemical Passivation Treatments for Stainless Steel Parts

**ANSI/AWWA C800** Standard for Underground Service Line Valve and Fittings

**NSF/ANSI STANDARD 61** - Drinking Water System Components

**ASTM D2000 - 12** Standard Classification Systems for Rubber Products


**CAUTION:** Saddles must not be reused until refurbished with new bolts and new gaskets at factory

**For All Sewer Applications:** Please Contact Total Piping Solutions for product options and availability  
NSF/ANSI/CAN 372 Safe Water Drinking Act (SDWA) lead-free plumbing requirements





**WARNING** This product is not intended for use on natural gas piping or any other type of gas piping. To do so could result in escaping gas that could ignite and cause property damage, serious injury or death.





**WARNING** This is a non-restraining product. If pipe pullout can occur, proper anchoring of the pipe joint is required. Failure to anchor the pipe could result in the escape of line content, and may cause property damage, serious injury or death.






**WARNING** This product is intended for use on HDPE SDR-17 or greater wall thicknesses, and shall be used for buried service only. The Triple Tap product line is not approved for above ground applications on HDPE or other plastic pipe

# TPS Abandoned Corporation Fittings


## BENEFITS:

- » 3" and 4" Domed Outlets
- » Covers any corporation stops in pipe diameters from 4" to 16"
- » Additional sizes available up to 48"
- » Full gasket coverage to limit contact of dissimilar pipe materials
- » Branch gasket provides extra positive seal on mainline
- » Allows for termination lead service line corporation valve with minimal disruption



## Technical Specifications

Size	Range
4" u.s.	4.45 - 5.13
4" o.s.	4.74 - 5.61
6" u.s.	6.55 - 7.42
6" o.s.	6.84 - 7.65
8" u.s.	8.54 - 9.44
8" o.s.	8.98 - 9.84
10" u.s.	10.64 - 11.46
10" o.s.	11.34 - 12.16
12" u.s.	12.62 - 13.56
12" o.s.	13.65 - 14.42
14" u.s.	15.22 - 16.16
14" o.s.	16.18 - 16.92
16" u.s.	17.25 - 18.18
16" o.s.	18.42 - 19.23

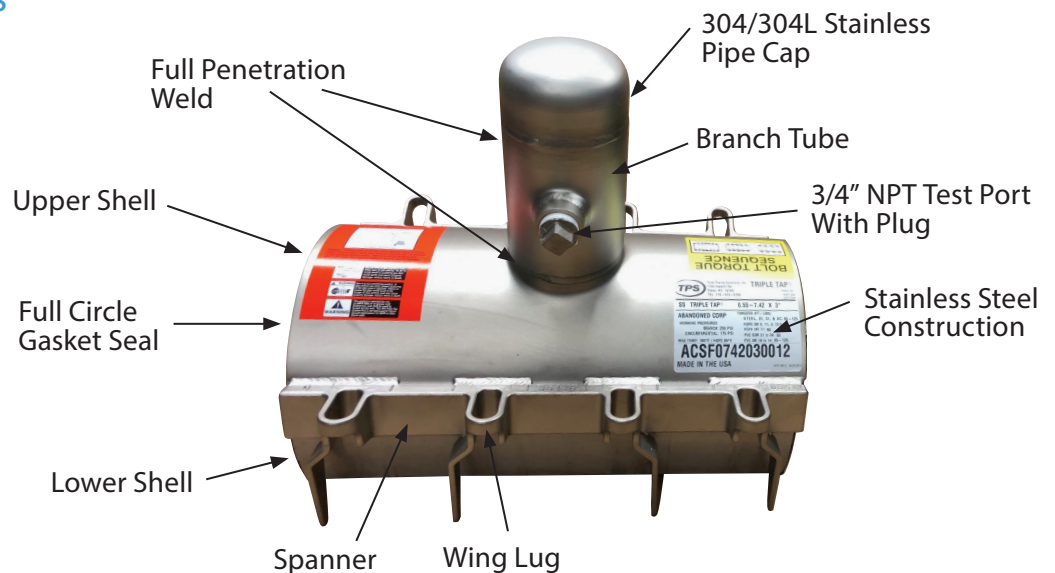

## Specifications

**Pressure Rating:** Maximum working pressure up to 250 psi, qualification tested to 1.5x working pressure (up to 375psi) and is determined by the actual diameter of the pipe

**Temperature Rating:** 80" maximum continuous working temperature

**Gasket Material:** NSF-61 Approved NBR Rubber – For Water Service (EPDM available upon request)

**Shell:** Heavy duty type 304 Stainless Steel, fully passivated for corrosion protection

**Alignment Lugs:** Heavy Duty Cast Type 304, 18-8 Stainless Steel permanently welded fused to band with integrated handle for ease of assembly

**Bolts/Nuts/Washers:** Type 304 Stainless steel, Bolt threads 5/8" Rolled, with fluoropolymer coating to prevent galling

**Branch:** 3" and 4" type 304 18-8 Stainless Steel branch sizes with 3/4" NPT test port with plug



Dresser Pipeline Solutions  
1760 Haskell Road  
Olean, NY 14760  
P: 716-372-0160  
F: 716-372-1767  
[www.dresserutility.com/water](http://www.dresserutility.com/water)

